


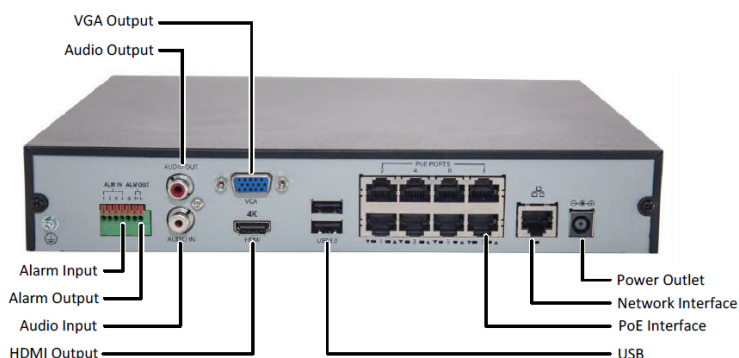

Features

- 4 channel input
- Plug & Play with 4/8 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance
- 1CH HDMI, 1CH VGA, HDMI at up to 4K(3840 x 2160) resolution
- Up to 8 Megapixels resolution recording
- H.265/H.264 video formats
- Accurate retrieval, instant playback
- 1 SATA HDD up to 6 TB
- Supports P2P, UPnP, NTP, DHCP, PPPoE
- Includes mobile client access

Specifications

VIDEO INPUT/ OUTPUT	
IP Video Input	4CH
Two-way Audio Input	1CH, RCA
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128

VIDEO/AUDIO OUTPUT

HDMI/VGA Output	HDMI: 4K (3840 x 2160)/30Hz, 1920 x 1080p/60Hz, 1920 x 1080p/50Hz, 1600 x 1200/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz, 1024 x 768/60Hz VGA: 1920 x 1080p/60Hz, 1920 x 1080p/50Hz, 1600 x 1200/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz, 1024 x 768/60Hz
Recording Resolution	8MP / 6MP / 5MP / 4MP / 3MP / 1080p / 960p / 720p / D1 / 2CIF / CIF
Audio Output	1CH, RCA
Synchronous Playback	4CH

DECODING

Live view/Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Compression	H.265/H.264
Capability	1 x 4K@30, 3 x 4MP@20, 4 x 1080p@25, 8 x 720p@25, 16 x D1

HARD DISK

SATA	1 SATA interface
Capacity	up to 6TB for each disk

EXTERNAL INTERFACE

Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0, Front panel: 1XUSB2.0
Alarm In	4CH
Alarm Out	1CH
PoE	
Interface	4 independent 100Mbps PoE network interfaces
Supported Standard	IEEE 802.3at, IEEE 802.3af

GENERAL

Power Supply	48V DC
PoE	Max 30W for single port Max 54W in total (13.5W /ea.)
Consumption (without HDD)	≤ 5W
Working Temperature	-10°C ~ + 55°C (+ 14°F ~ + 131°F)
Working Humidity	10% ~ 90%
Dimensions	260 x 44 x 240 (mm) (10.2" x 1.7" x 9.4") (in)
Weight	≤ 1.12 Kg (2.47 lb)

Dimensions

