

2MVIP-2MIR30V-E

Vandal-resistant Network IR Fixed Dome Camera



Features

Optics

- Day/night functionality
- Smart IR , up to 30 m (98 ft) IR distance
- IR anti-reflection window to increase the infrared transmittance
- 2D/3D DNR (Digital Noise Reduction)
- Compression
- Ultra 265,H.265, H.264, MJPEG
- Triple streams

Network

- ONVIF Conformance

Structure



- Wide temperature range: -40°C to 60°C (-40°F to 140°F)
- Wide voltage range of $\pm 25\%$
- IK10 vandal resistant IP67

CAMERA					
Sensor		1/2.7", 2.0 megapixel, progressive scan, CMOS			
Lens		2.8~12 mm, manual zoom lens			
DORI Distance	Lens	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	2.8mm	42	16.8	8.4	4.2
	12mm	180	72	36	18
Angle of View (H)		112.7°~28.1°			
Angle of View (V)		60.1°~15.4°			
Angle of View (O)		146.5°~33.2°			
Adjustment Angle		Pan: 0°~360°, Tilt: 0°~90°, Rotate: 0°~360°			
Shutter		Auto/Manual, 1/6~1/100000 s			
Minimum Illumination		Color: 0.02Lux (F1.6 AGC ON) 0 Lux with IR			
Day/Night		IR-cut filter with auto switch (ICR)			
Digital noise reduction		2D/3D DNR			
IR Range		Up to 30m (98 ft) IR range			
Defog		Digital Defog			
WDR		DWDR			
VIDEO					
Video Compression		Ultra 265,H.265, H.264,MJPEG			
H.264 code profile		Baseline profile, Main Profile, High Profile			
Frame Rate		Main Stream:1080P (1920×1080): Max. 25 fps; Sub Stream:720P (1280×720): Max. 25 fps; Third Stream: D1 (704×576): Max. 25 fps			
HLC		Supported			
BLC		Supported			
OSD		Up to 4 OSDs			
Privacy Mask		Up to 8 areas			
ROI		Up to 2 areas			
Motion Detection		Up to 4 areas			
NETWORK					
Protocols		IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, SNMP			
Compatible Integration		ONVIF(Profile S), API			
INTERFACE					
Network		10M/100M Base-TX Ethernet			
GENERAL					
Power		DC12V±25%, PoE (IEEE802.3 af)			
Power Consumption		Power consumption: Max 7.8W			
Dimensions		Φ148 x 111.3 mm (Ø5.8" x 4.4")			
Weight		0.75 kg (1.7 lb)			
Working Environment		-40°C ~ +60°C (-40°F ~ 140°F), Humidity:10%~95% RH(non-condensing)			
Ingress Protection		IP67			
Vandal Resistant		IK10			
Reset Button		Supported			

2MVIP-2MIR30V-E

Vandal-resistant Network IR Fixed Dome Camera

Dimensions

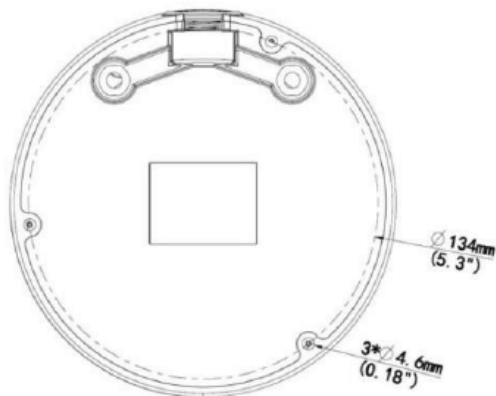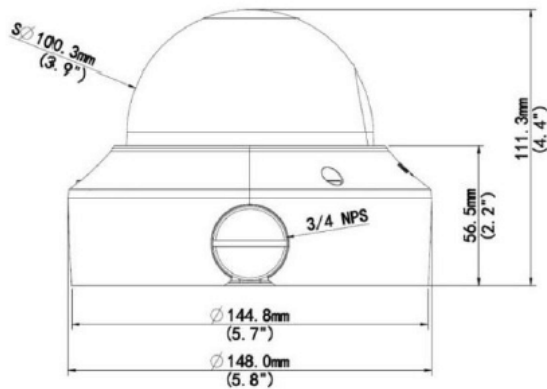

*Product specifications and availability are subject to change without notice.