




Features

- Support Ultra 265/H.265/H.264 video formats
- 4/8-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 2MP resolution recording
- 1 SATA HDD up to 10 TB
- Support cloud upgrade

Specifications

| VIDEO & AUDIO | |
|-----------------------------|---|
| IP Video Input | 8-ch |
| Network | |
| Incoming Bandwidth | 40Mbps |
| Outgoing Bandwidth | 40Mbps |
| Remote Users | 128 |
| Protocols | P2P, UPnP, NTP, DHCP, PPPoE |
| Video/Audio Output | |
| HDMI/VGA Output | HDMI: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |
| Recording Resolution | 1080p/960p/720p/D1/2CIF/CIF |
| Synchronous Playback | 8-ch |
| Corridor Mode Screen | 3/4/5/7/9 |
| Decoding | |
| Decoding format | Ultra 265, H.265, H.264 |
| Live view/ Playback | 1080p/960p/720p/D1/2CIF/CIF |
| Capability | 4 x 1080p@20, 4 x 720p@30 |
| Hard Disk | |
| SATA | 1 SATA interfaces |
| Capacity | up to 10TB for each disk |
| External Interface | |
| Network Interface | 1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface |
| USB Interface | Front panel: 1 x USB2.0, Rear panel: 1 x USB2.0 |
| GENERAL | |
| Power Supply | 12V DC Power Consumption: ≤3.2 W (without HDD) |
| Working Environment | -10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing) |
| Dimensions | 260 x 240 x 43 (mm) (10.2" x 9.4" x 1.7") (in) |

Dimensions

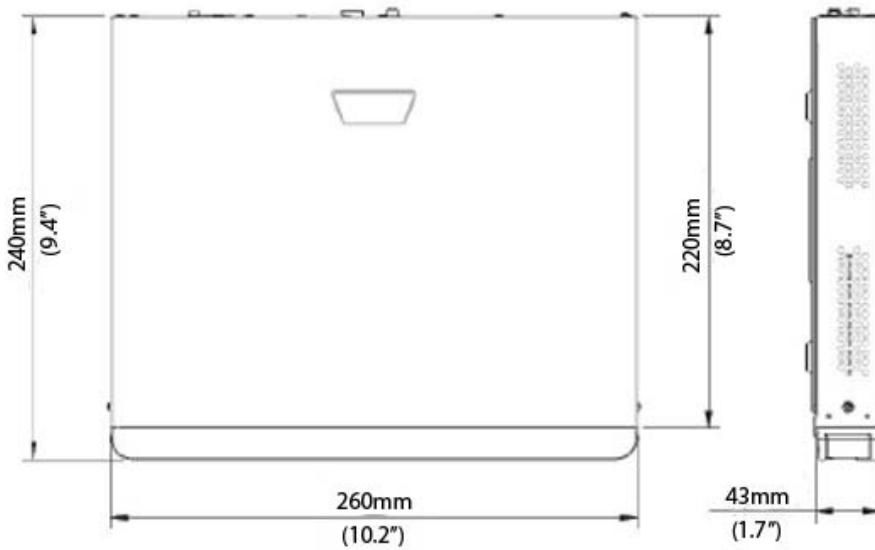

Rear Panel

