



## Features


- Support Ultra 265/H.265/H.264 video formats
- 4/8/16-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 1 SATA HDD up to 10 TB
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

## Specifications

VIDEO & AUDIO	
<b>IP Video Input</b>	8-ch
<b>Two-way Audio Input</b>	1-ch, RCA
Network	
<b>Incoming Bandwidth</b>	60Mbps
<b>Outgoing Bandwidth</b>	64Mbps
<b>Remote Users</b>	128
<b>Protocols</b>	P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
<b>HDMI/VGA Output</b>	HDMI: 4K(3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
<b>Recording Resolution</b>	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
<b>Audio Output</b>	1-ch, RCA
<b>Synchronous Playback</b>	8-ch
<b>Corridor Mode Screen</b>	3/4/5/7/9
Decoding	
<b>Decoding format</b>	Ultra 265, H.265, H.264
<b>Live view/ Playback</b>	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
<b>Capability</b>	1 x 4K@30, 2 x 4MP@30, 4 x 1080p@30, 8 x 720p@30, 16 x D1
Hard Disk	
<b>SATA</b>	1 SATA interfaces
<b>Capacity</b>	up to 10SSTB for each disk
External Interface	
<b>Network Interface</b>	1 RJ-45 10M/100M Self-adaptive Ethernet Interface
<b>USB Interface</b>	Rear panel: 2 x USB2.0, Front panel: 1 x USB2.0
<b>Alarm In</b>	4-ch
<b>Alarm Out</b>	1-ch

GENERAL	
<b>Power Supply</b>	12V DC Power Consumption: ≤ 8 W( without HDD )
<b>Working Environment</b>	-10°C ~ + 55°C ( +14°F ~ + 131°F ), Humidity ≤ 90% RH(non-condensing)
<b>Dimensions</b>	260 x 240 x 43 (mm) (10.2" x 9.4" x 1.7") (in)

## Dimensions

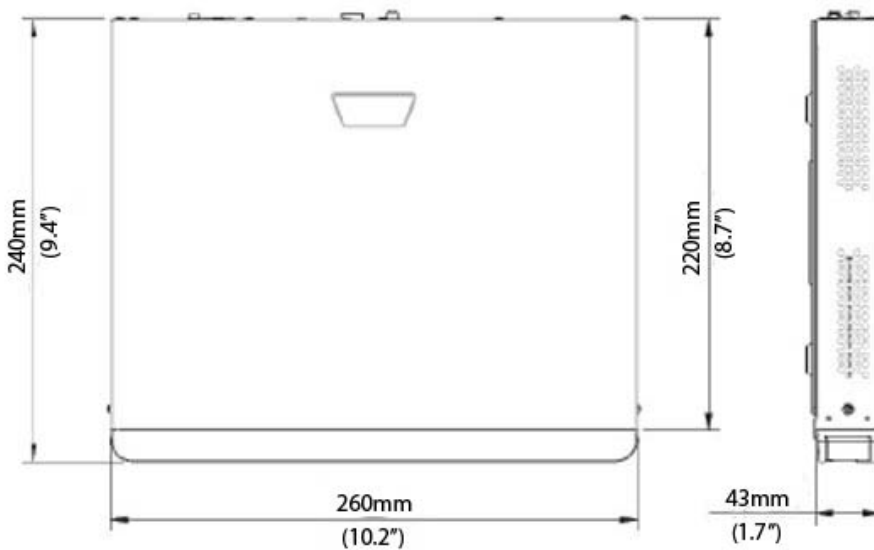

## Rear Panel

