



## Features


- Support Ultra 265/H.265/H.264 video formats
- 16/32-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 2-ch HDMI, 1-ch VGA, HDMI2 at up to 4K(3840x2160) resolution
- HDMI1/VGA and HDMI2 independent outputs provided
- Up to 12 Megapixels resolution recording
- 4 SATA HDDs, Up to 10TB for each HDD
- Various fisheye dewarping modes for live view and playback for both web interface and GUI
- Support for 12V Power output
- Plug & Play with up to 16 independent PoE network interfaces
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

## Specifications

VIDEO & AUDIO	
<b>IP Video Input</b>	16-ch
<b>Two-way Audio Input</b>	1-ch, RCA
Network	
<b>Incoming Bandwidth</b>	112Mbps
<b>Outgoing Bandwidth</b>	96Mbps
<b>Remote Users</b>	128
<b>Protocols</b>	P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
<b>HDMI/VGA Output</b>	VGA: 1024X768@60,1280X720@60,1280X1024@60,1920X-1080@50,1920X1080@60 HDMI: 4k(3840x2160@30),4k(3840x2160@60),1024X768@60,1280X-720@60,1280X1024@60,1920X1080@50,1920X1080@60
<b>Recording Resolution</b>	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
<b>Audio Output</b>	1-ch, RCA
<b>Synchronous Playback</b>	16-ch
<b>Corridor Mode Screen</b>	3/4/5/7/9/10/12/16
Decoding	
<b>Decoding format</b>	Ultra 265, H.265, H.264
<b>Live view/ Playback</b>	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
<b>Capability</b>	1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30,16 x D1
Hard Disk	
<b>SATA</b>	2 SATA interfaces
<b>Capacity</b>	up to 10TB for each disk
External Interface	
<b>Network Interface</b>	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
<b>USB Interface</b>	Front panel: 1 x USB2.0, Rear panel: 1 x USB2.0
<b>Alarm In</b>	4-ch
<b>Alarm Out</b>	1-ch
PoE	
<b>Interface</b>	8 independent 100Mbps PoE network interfaces
<b>Max Power</b>	Max 30W for single port Max 130W in total ( 16.25W for each )

<b>Supported Standard</b>	IEEE 802.3at
<b>GENERAL</b>	
<b>Power Supply</b>	220V AC Power Consumption: ≤9 W( without HDD )
<b>Working Environment</b>	-10°C ~ + 55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing)
<b>Dimensions</b>	86 x 442 x 425 (mm) (3.4" x 17.4" x 16.7") (in)
<b>Weight ( without HDD )</b>	≤ 5.24 Kg ( 11.55 lb )

## Dimensions

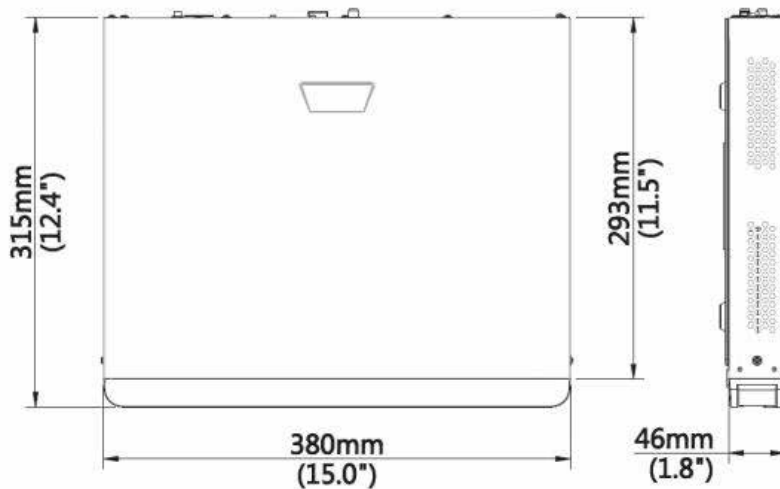

## Rear Panel

