

2MVT-2MIR30

2MP HD 1080P Smart IR Turret Camera




Features

- 2 megapixel high performance CMOS
- Analog HD output, up to 1080p resolution
- True Day/Night,
- Smart IR
- EXIR 2.0, smart IR, up to 30m IR distance
- Switchable TVI/AHD/CVI/CVBS
- IP66

CAMERA	
Image Sensor	2 MP CMOS image sensor
Signal System	PAL/NTSC
Frame Rate	PAL: 1080p@25fps; NTSC: 1080p@30fps
Resolution	1920 (H) × 1080 (V)
Min. Illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	1/25(1/30) s to 1/50,000 s
Lens	2.8 mm fixed lens
Horizontal Field of View	103°
Lens Mount	M12
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Synchronization	Internal synchronization
MENU	
AGC	Low/middle/high
Day/Night Mode	Smart/color/BW(Black and White)
Backlight Compensation	Yes
WDR	D-WDR
Language	English, Chinese
Functions	Brightness, Sharpness, DNR, Mirror
INTERFACE	
Video Output	1 HD analog output
Switch Button	TVI/AHD/CVI/CVBS
GENERAL	
Operation Temperature	-40 °C to 60 °C (-40 °F to 140 °F)
Operation Humidity	Humidity: 90% or less (non-condensation)
Power Supply	12 V DC ± 15%
Power Consumption	Max. 4 W
Ingress Protection	IP66
Material	Metal/Plastic
IR Range	Up to 30m
Dimension (Diam x H)	Ø 110 x 93.2 (mm)/4.33" x 3.67" (in.)
Weight	350 g (0.77 lb.)

Features

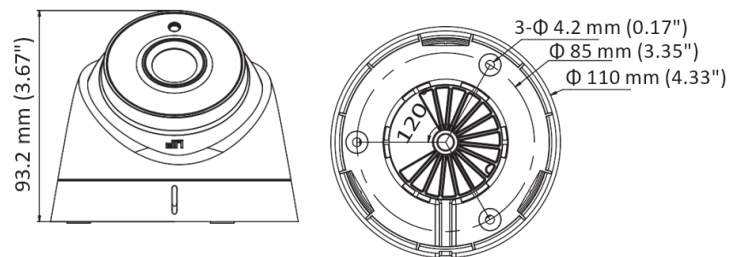

Also Available



2MJB-30VT Junction Box

Features:

- Aluminum alloy material with surface spray treatment
- Waterproof Design
- Junction Box for Dome Camera
- Appearance: White
- Material: Aluminum Alloy
- Dimension: 157 x 185 x 51.5 (mm)
- Weight: 621g