

2MVT-5MIR35ZSL

5MP Lite 4IN1 5X AF HD Dome IR 30m with Starlight




Features

Features:

- 1/2.8"SONY Starvis Back-illuminated CMOS sensor
- TVI/AHD/CVI/CVBS 4-IN-1
- 2.7-13.5mm Motorized Lens
- IR Distance max 30m
- IP66 outdoor, OSD & UTC support

Dimensions

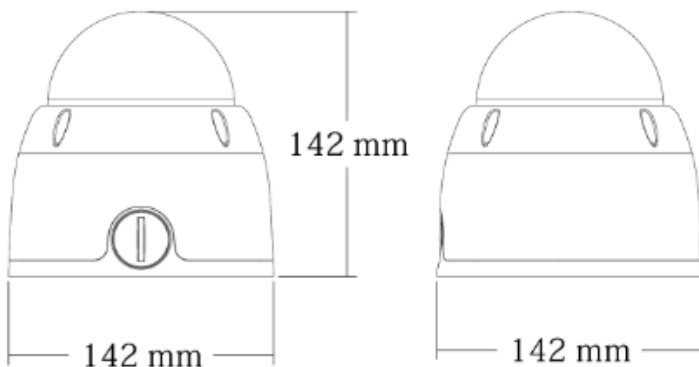

Specifications

CAMERA	
Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor
Image Resolution	8M:3840*2160 5M:2592*1944 4M:2560*1440 2M:1920*1080
TV System	PAL/NTSC
Electronic Shutter	AUTO / MANUAL
Scanning System	Progressive Scan
Video Output Mode	AHD: 8M@15fps, 5M@20fps/12.5fps, 4MP@30fps/25fps/15fps; 2M@30fps/25fps; CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps; TVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps
LENS	
Focus Length	2.7-13.5mm
Focus Control	Auto
Lens Type	Motorized
NIGHT VISION	
IR Cut Filter	YES
Infrared LED	42μ x 4PCS
Infrared Distance	30M
IR Status	AGC Auto Control
CAMERA	
Starlight	YES
Day/Night	YES
OSD Menu	YES
WDR	YES
UTC	YES
Noise Reduction	3DNR
White Balance	AUTO / MANUAL
Gain Control	AUTO
GENERAL	
Housing	Metal, IP67
Bracket	NO
Operation Temperature	-10°C ~ 60°C RH95% Max
Storage Temperature	-20°C ~ 60°C RH95% Max
Power Source	DC12V±10%, 750mA
Dimension	Φ142 x 142(H) mm
Weight	2.65 lbs