

2MITD-2 Standing Human Body Temperature Screening System




Specifications	
Measurement area	Wrist
Measurement range	30°C to 45°C
Precision	0.1°C
Measurement deviation	$\leq \pm 0.3^{\circ}$ C
Measurement distance	1cm to 4cm
Display	7" touch screen
Alarm mode	Sound alarm
Counting	Alarm count, normal count (resettable)
Material	Stainless steel
Power supply	DC 12V±25% input
Dimensions	Temperature measurement module: 137.5mm (L) \times 68.0mm (W) \times 360.8mm (H)
	Bracket: 60mm (diameter) x 680mm (height)
	Pole: 38mm (diameter) x (250mm/500mm) (height)
Operating temperature	10°C to 40°C
Operating humidity	<95%, non-condensing
Application Situation	Indoor, windless environment


Overview

2MITD-2 is a non-contact temperature measuring instrument which measures wrist temperature. It provides abnormal alarm and counting features and is mounted on an adjutable pole. 2MITD-2 can be widely used in schools, office buildings, communities, subway stations, airports, etc.

Features

- Non-contact measurement on the wrist, helping prevent cross infection.
- Real-time alarm, quick detection of abnormal temperatures.
- High accuracy, measurement deviation is less than or equal to 0.3°C, and measurement distance is between 1cm to 4cm
- Real-time display of measured temperatures, normal and abnormal temperature counts on LCD screen.
- · Stainless steel bracket.
- Adjustable pole can be set at two different heights.

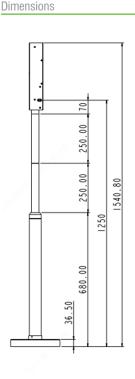

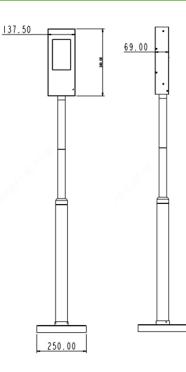

F© (€ RoHS