


2MEAC16-T5MZ

5MP HD Analog 4-in-1 Motorized Infrared Bullet Camera with
Air Cooling Explosion Proof Camera Housing - 316L Stainless Steel

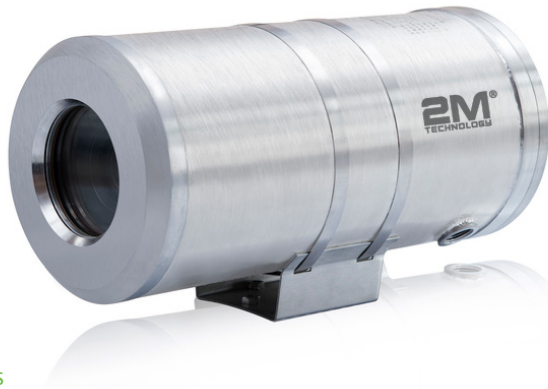

Features

- 4 in 1 bullet camera
- 1/2.8" Sony 335 CMOS 5.0M + NVP2477
- 30pcs SMD LEDs
- 40m IR Range
- Standard match 2.8-12mm motorized lens
- With 3DNR
- Default TVI output
- Constructed of stainless steel 316L
- IP68 ingress protection
- Air cooling system
- 2x G3/4 or NPT3/4 cable entries
- Can be wall or pole mounted

CERTIFICATES

Certificate Mark ExdIIIC T5 GB/DIP A20 TA, T5

MECHANICAL

Housing Stainless steel 304 (also available in 316L)

IP IP68

Cable Thread Hole 2pcs G3/4 or NPT3/4

ELECTRICAL

Voltage AC85V~AC265V or DC24V or AC24V

Power 15W

AMBIENT

Ambient Temperature Air cooling -25°C – 50°C, [-13°F – 122°F]

Air Pressure 80Kpa to 106Kpa

Relative Humidity ≤95% (no condensation)

GENERAL

Size 374 x 163 x 185 (mm) 14.8" x 6.4" x 7.3" (in)

Housing Inner Size 260 x 80 x 80 (mm) 10.2" x 3.1" x 3.1" (in)

Weight 9.1kg (20.1 lbs)

Mounted wall, pole

CAMERA SPECIFICATIONS


Power System	NTSC
Sensor	IMX335 1/2.8
DSP	NVP2477H
Active Pixel	2560 x 1944
Sync.	Internal
Resolution	5MP
Video Out	A/T/C/CVBS
Minimum Illumination	0.01Lux (F1.2)
Gama adjust	0.45
Electric Shutter	AUTO FLK 1/25-1/50000
S/N Ratio	48dB(min)(AGC closed)
NR	2DNR OFF/LOW/MID/HIGH; 3DNR OFF/LOW/MID/HIGH
White Balance	ATW/AWC-SET
AGC	Level 0-15
D-WDR	OFF/Auto
OSD	Yes
Language	Eng CHN1/2 GER FRA ITA SPA POL RUS POR NED TUR JPN
Day/Night	Auto, Color, B/W, Ext
Power Input	DC12V±1V
Power Dissipation	85-95MA
Transmission distance	75-5 300M
Operation Temperature	Temperature -10°C +55°C, Humidity less than 85%RH
Weight	1.87 lbs
Color	white + black
Wall Bracket	2MEWB04 (304); 2MEWB16 (316L)
OSD	Up to 4 OSDs
Privacy Mask	Up to 8 areas
ROI	Up to 2 areas
Motion Detection	Up to 4 areas
NETWORK	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL
Compatible Integration	ONVIF (Profile S, Profile G), API
INTERFACE	
Network	1 RJ45 100M Base-TX Ethernet
Edge Storage	Micro SD, up to 128GB
GENERAL	
Power	12V DC±25%, PoE (IEEE802.3 af)
Power Consumption	Max 6.5W
Dimensions (L × W × H)	253.4×86×71.7 (mm) [9.98" x 3.4" x 2.8" (in)]
Weight	1 Kg (2.2 lbs)
Working Environment	-30°C ~ +60°C (-22°F ~ 140°F)
Working Humidity	10%~90% RH (non-condensing)
Ingress Protection	IP67
Vandal Resistant	IK10

2MEAC16-T5MZ

5MP HD Analog 4-in-1 Motorized Infrared Bullet Camera with
Air Cooling Explosion Proof Camera Housing - 316L Stainless Steel

Dimensions

Optional Accessories

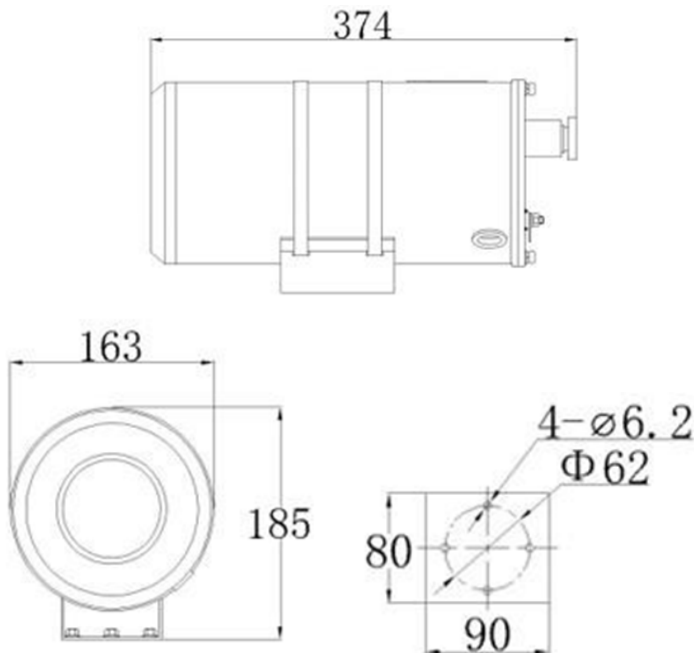

Dimensions in mm



Wall Bracket

2MEWB04 (304); 2MEWB16 (316L)

ATEX Markings Breakdown

MARKING ACCORDING ATEX DIRECTIVE 94/9/EC AND IECEx CERTIFICATION SCHEME

