




Features

- 316L Stainless steel (Also available in 304 SS)
- 1pcs G3/4 or NPT3/4
- Rated for outdoors IP68
- PTZ Housing with IR LED Only
- CNEEx No: 13.3111
- Corrosion proof paint optional
- Vertical: -90° ~ -90°
- Rotation speed: 0.1°-45°/s
- Wide voltage input: AC24V,
- AC100-240V
- 26.4K/8MPG

HOUSING	
Certificate Mark	ExdIIIC T6 GB/DIP A20 TA, T6
Certificate No	CNEEx13.3111
Standards	Q/320412 ZAF047-2013
MECHANICAL	
Housing	Stainless steel 316L (Also available in 304 SS)
IP	IP68
Cable Thread Hole	1pcs G3/4 or NPT3/4
Wiper	Yes
AMBIENT	
Ambient Temperature	-25°C to +60°C
Air Pressure	80Kpa to 106Kpa
Relative Humidity	≤95% (no condensation)
ELECTRICAL	
Voltage	AC85V~AC265V or DC24V or AC24V
Power	50W /70W (with thermostat)
LIGHTS	
Light distance	100m
Light Control	Supported
GENERAL	
Cable	Integrated cable
Dimensions (LxWxH)	502 x 292 x 443 mm / 19.8" x 11.5" x 17.4" in.
Weight	24.5kg [54 lbs]
Mounted	Wall, Pole

Dimensions

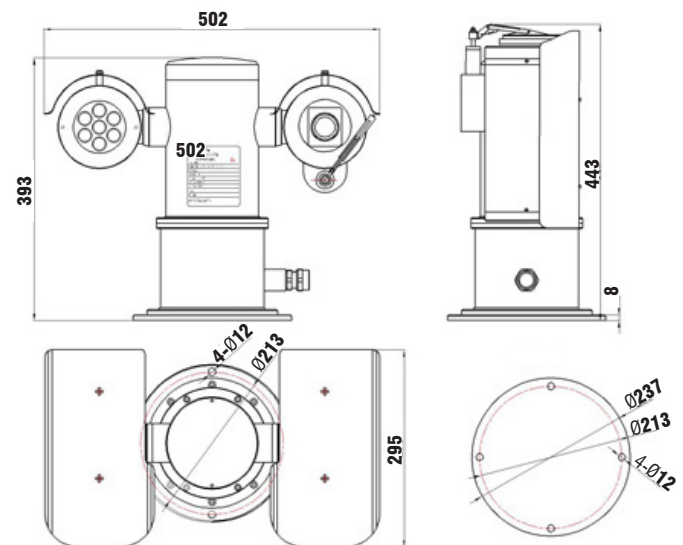

ATEX Markings Breakdown

