

2MEB16-T5M

5MP 4-in-1 Mini Explosion Proof Camera
with Fixed Lens – 316L Stainless Steel




Features

- 316L Stainless steel (also available in 304 SS)
- 5MP Resolution
- Protection enclosure: IP68
- 4-in-1 bullet camera
- 1/2.8" Sony 335 CMOS 5.0M + NVP2477
- 20m IR Range
- Standard match 2.8mm lens
- With 3DNR
- Default TVI output

CERTIFICATE	
Certificate Mark	ExdII C T6 Gb/ Ex tD A21 IP68 T80°C
MECHANICAL	
Housing	Stainless steel 316L (also available in 304)
IP	IP68
Cable Thread Hole	1pcs G3/4 or NPT3/4
ELECTRICAL	
Voltage	DC24V or POE power supply
Power	8W
AMBIENT	
Ambient Temperature	-25°C to 60°C [-13°F to 140°C]
Air Pressure	80Kpa to 106Kpa
Relative Humidity	≤ 95% (no condensation)
LIGHTS	
Light Distance	20-30m
CAMERA	
Power System	NTSC
Sensor	IMX335 1/2.8
DSP	NVP2477H
Active Pixel	2560 x 1944
Sync	Internal
Resolution	5MP
Video Out	A/T/C/CVBS
Minimum Illumination	0.01Lux(F1.2)
Gama Adjust	0.45
Electric Shutter	AUTO FLK 1/25-1/50000
S/N Ratio	48dB(min)(AGC closed)
NR	2DNR OFF/LOW/MID/HIGH 3DNR OFF/LOW/MID/HIGH
WHITE Balance	ATW/AWC-SET
AGC	Level 0-15
D-WDR	OFF/Auto
OSD	Yes
Language	Eng CHN1/2 GER FRA ITA SPA POL RUS POR NED TUR JPN
Day/Night	Auto, Color, B/W, Ext

Power Input	DC12V±1V
Power Dissipation	85-95MA
Transmission Distance	75-5 300M
Operation Temperature	Temperature -10°C+55°C, Humidity less than 85%RH
Cable	Integrated
Size	158 x 144 x 167 mm / 6.2" x 5.7" x 6.6" in.
Weight	4 kg / 2.2 lbs

Features

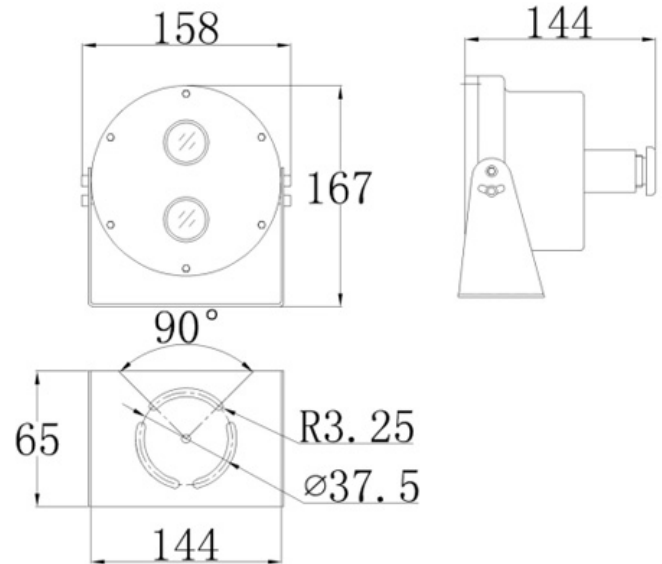

ATEX Markings Breakdown

