



Features

- High quality image with 4MP, 1/3"CMOS sensor
- 4MP (2688 x 1520)@ 25/20fps; 4MP (2560 x 1440)@ 25/20fps; 3MP (2304 x 1296)@ 30/25fps; 2MP (1920 x 1080)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 40m (131ft) IR distance
- Supports 256G Micro SD card
- IK10 vandal resistant
- IP67 protection
- Support PoE power supply
- 3-Axis

Functions

CAMERA					
Sensor		1/3", 4.0 megapixel, progressive scan, CMOS			
Lens		2.8 ~ 12mm, AF automatic focusing and motorized zoom lens			
DORI Distance	Lens	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	2.8	42	16.8	8.4	4.2
	12	180	72	36	18
Angle of View (H)		102.79°~ 30.86°			
Angle of View (V)		54.50°~ 17.49°			
Angle of View (O)		106.94°~35.49°			
Adjustment Angle		Pan: 3° ~ 360°, Tilt: 0° ~ 70°, Rotate: 3° ~ 360°			
Shutter		Auto/Manual, 1 ~ 1/100000s			
Minimum Illumination		Color: 0.003Lux (F1.6, AGC ON) 0 Lux with IR			
Day/Night		IR-cut filter with auto switch (ICR)			
Digital Noise Reduction		2D/3D DNR			
S/N		>56dB			
IR Range		Up to 40m (131ft) IR range			
Wavelength		850nm			
IR On/Off Control		Auto/Manual			
Defog		Digital Defog			
WDR		120dB			
VIDEO					
Video Compression		Ultra 265, H.265, H.264, MJPEG			
H.264 Code Profile		Baseline profile, Main Profile, High profile			
Frame Rate		Main Stream: 4MP (2688*1520), Max 25fps; 4MP (2560*1440), Max 25fps; 3MP (2304*1296), Max 30fps; 1080P (1920*1080), Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps;			
Video Bit Rate		128 Kbps~16 Mbps			
9:16 Corridor Mode		Supported			
OSD		Up to 4 OSDs			
Privacy Mask		Up to 4 areas			
ROI		Up to 8 areas			
Motion Detection		Up to 4 areas			
IMAGE					
White Balance		Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2			
Digital Noise Reduction		2D/3D DNR			
Smart IR		Supported			
Flip		Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise			
Dewarping		NA			
HLC		Supported			
BLC		Supported			

2MVIP-4MIR30Z-G

4MP Motorized Lens HD IR Vandal-proof Dome Network Camera

AUDIO

Audio Compression	G.711
Suppression	Supported
Sampling Rate	8KHZ

STORAGE

Edge Storage	Micro SD, up to 256GB
Network Storage	ANR, NAS (NFS)

NETWORK

Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS, 802.1x, SNMP
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
Client	2M Station
Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
	Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+, Safari 11+

INTERFACE

Built-in Mic	Supported
Network	10M/100M Base-TX Ethernet



CERTIFICATIONS

Certifications	CE: EN 60950-1, FCC: FCC Part 15
----------------	----------------------------------

GENERAL

Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption: Max 7.5W
Dimensions (Ø x H)	Ø128.1 x 100 (mm)/Ø 5.04" x 3.93"
Net Weight	0.65kg (1.43lb)
Material	Metal + Plastic
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Surge Protection	6KV
Ingress Protection	IP67
Vandal Resistant	IK10
Reset Button	Supported

Dimensions

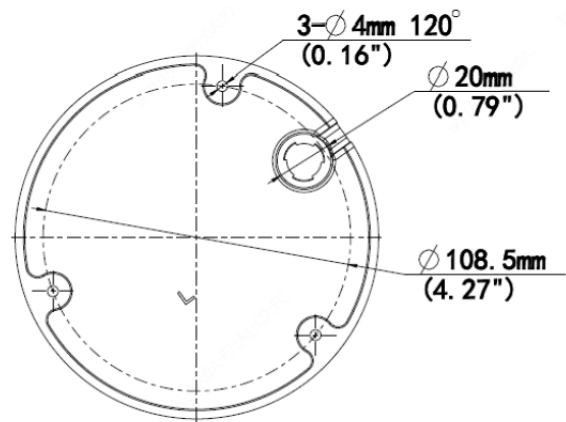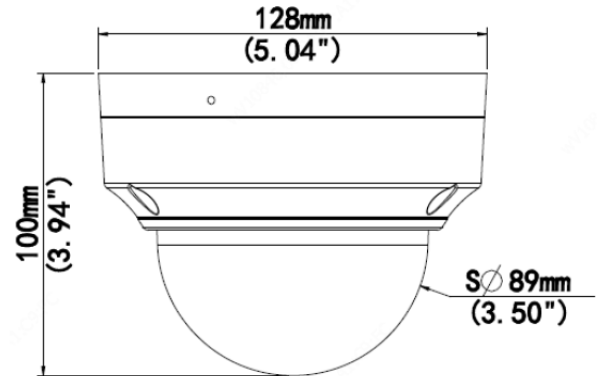

*Product specifications and availability are subject to change without notice.