



Features


- Cameras or LED lights are customizable to for a myriad of solutions.
- More like a generic pole mast Made with Q235 galvanized steel
- DC12V voltage
- Stainless steel fasteners and wire ropes
- Dusk/dawn timer
- Microcrystalline silicon solar panel
- Windproof up to 117km/h (73mph)

Specifications

GENERAL	
Material	Steel Q235
Rating	Rated for outside use
Dimensions (LxWxH)	2000×1050×4100 (mm) 6.6×3.4×13.5 (ft)
Shipping Dimensions	1050×1050×600 (mm) 3.4×3.4×2.0 (ft)
Transport Dimensions	1050×1050×2800 (mm) 3.4×3.4×9.2 (ft)
Weight	375kg / 827lb
System Voltage	DC12V
Work Temperature:	-0°C~45°C / 32°F~113°F
SOLAR SYSTEM	
Solar Panel	1 × 460W Monocrystalline Silicon 72pcs
Voltage	DC49V
Charging Time	4.4 Hours
CCTV SYSTEM	
Box	Square
Device	PoE Switch
Running Time	48 hours for 40W
MAST SYSTEM	
Body	Steel Q235 Galvanized
Fastener	Stainless steel 304
Wire Rope	Stainless steel 316 4mm
Type	Square, Telescopic
Height	3.5m / 11.5ft
Section	3
Spring Cable	Power Supply
Lifting Method	Manual Winch
Recommended Load	5kg ~ 50kg / 11lb ~ 110lb
Windproof	117km/h / 73mph
BATTERY SYSTEM	
LFP	1x 200 Ah
Voltage	DC12V
Power Capacity	2400W/h
CONTROL SYSTEM	
Solar Controller	MPPT 40A
Efficiency	95%+

Detection & Protection	Short-Circuit Overload High Voltage High Temperature
Timer	Dusk & Dawn
Whole Machine	Battery Isolator Device on-off
BASE SYSTEM	
Base	Galvanized, Durable
Fixed Ring	4
Forklift Hole	4
Warranty	2 years
ACCESSORIES	
Includes	Operation manual, controler manual, parts manual, allen wrench and hex wrench
CERTIFICATION	
Certificates	ISO9001, ISO14001, OHSAS 18001, CE

Images

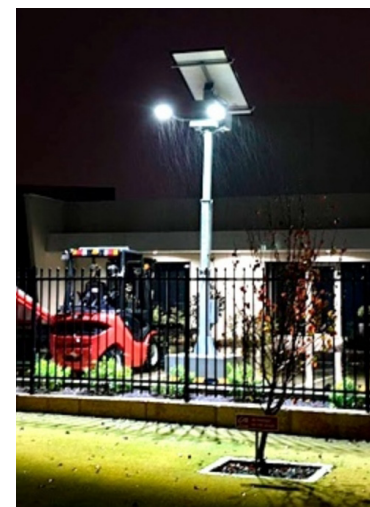

*Product specifications and availability are subject to change without notice.