




Features

- ATEX, IECEx certified
- Class 1 Div 2
- Application: Gas Zone 1, Zone 2; Dust Zone 21, Zone 22
- Exd II CT6 Gb/ Ex tD A21 IP68 T80°C
- Stainless steel 304 or 316L
- Optional electropolished or corrosion-resistant paint finish
- Enclosure protection IP66, IP68 (2m/2h)
- Country of origin: China

Dimensions

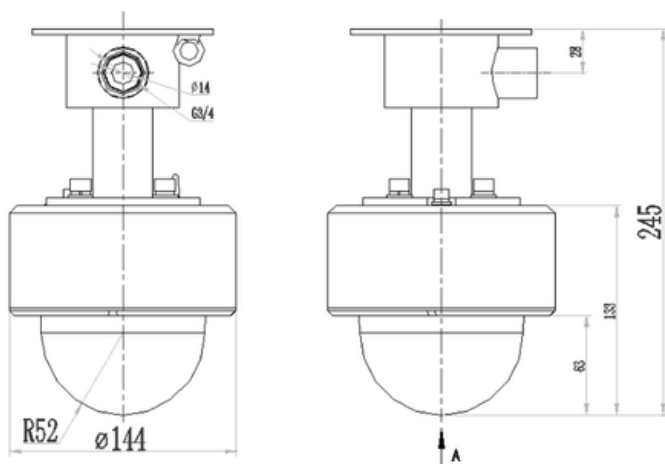

Specifications

CERTIFICATION	
Certifications	ATEX, IECEx
Explosion-Proof Certifications	DNV 21 ATEX 24764X IECEx DNV 21.0047X
ATEX Explosion-Proof Marking	Ex II 2 G Ex db IIC T6 Gb Ex II 2 D Ex tb IIIC T80°C Db
IECEx Explosion-Proof Marking	Ex db IIC T6 Gb Ex tb IIIC T80°C Db
MECHANICAL	
Material	Stainless Steel 304 or 316L
Housing Finish	Optional electropolished or corrosion-proof paint finish
Enclosure Rating	IP66, IP68 (2m, 2h)
Cable Thread Hole	G-3/4"
ENVIRONMENTAL	
Operating Temperature	-40°C to +60°C (-40°F to +140°F)
Operating Humidity	<95% RH (non-condensing)
GENERAL	
Dimensions (Ø × H)	144 × 245 mm (5.67 × 9.65 in)
Weight (Without Ceiling Mount Bracket)	3.7 kg (8.2 lb)
Weight (With Ceiling Mount Bracket)	7 kg (15.4 lb)