


Step 1: Remove the six screws on the back of the housing and carefully pull off the rear cover. Inside, you will find the camera mounting plate and bracket.



Step 2: Detach the bracket from the mounting plate by removing the three screws at the bottom. Then remove the four screws from the bracket. Set these screws aside, as they will be used in the next step to secure the Verkada black plate to the bracket.

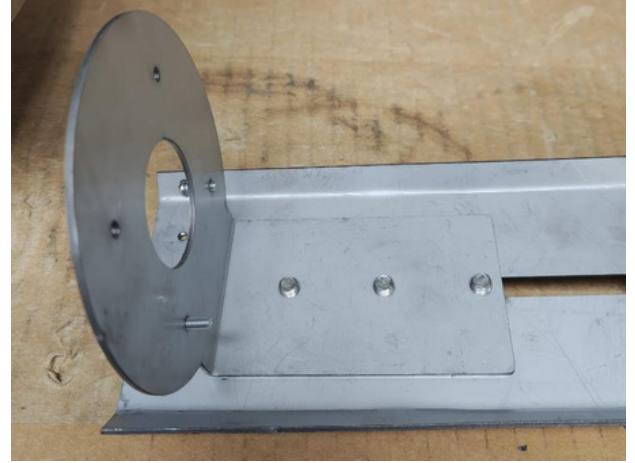


Step 3: Follow the Verkada camera installation guide to remove the black mounting plate from the back of the camera. Loosen the screw at the bottom, then twist and detach the plate. Align the plate with the housing mounting bracket.



Step 4: Attach the plate using the four screws removed in Step 2. Next, route the camera cable through the bracket opening and align the bracket and plate with the back of the camera. Twist to lock it in place, then turn the camera over and tighten the bottom screw to fully secure the plate and bracket.



Step 5: Align the three bracket holes with the elongated slot on the mounting plate, using the slot closest to the back of the housing. Secure the bracket in place with the three screws removed in Step 2.

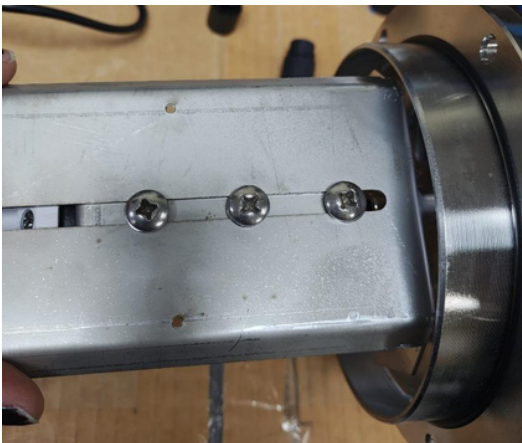

The final assembly should appear as shown below.

