




Features

- Applicable for hazardous areas:
 - Gas Zone 1 and Zone 2
 - Dust Zone 21 and Zone 22
- Controller for PTZ (Pan-Tilt-Zoom) cameras
- IP66-rated enclosure
- 304 or 316L Stainless Steel

Dimensions

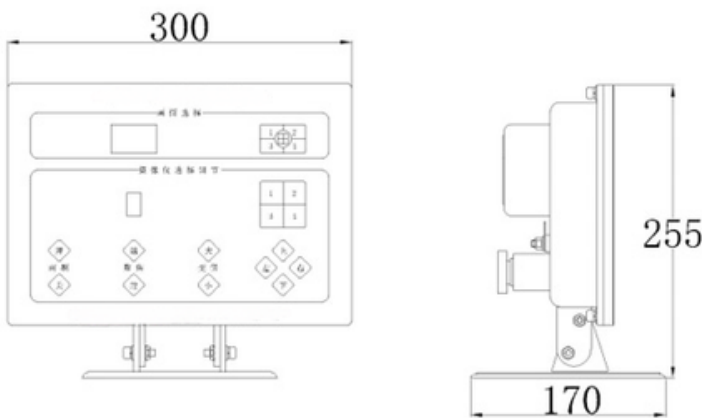

Specifications

CERTIFICATION

Certificate Mark	Exd IIB T6 Gb / DIP A20, TA T6
Certificate No.	CNEx16.3449X
Standards	Q/320412ZAF081-2016

MECHANICAL

Housing	Stainless steel 304 or 316L
Ingress Protection	IP66
Cable Thread Hole	6pcs G3/4 or NPT3/4

ELECTRICAL

Voltage	AC 85V-AC 265V or DC 24V or AC 24V
Power	50 W
Surge Protection	Optional, TVS6000V surge protection

AMBIENT

Operating Temperature	-25°C to +60°C (-13°F to +140°F) / -45°C to +80°C (-49°F to +176°F)
Operating Humidity	≤95% (non-condensing)
Air Pressure	80-106 KPa

COMMUNICATION

Communication	RS485
485 Communication	Support Pelco-D, Pelco-P
Communication Rate	2400-19200 bps

Video	Input	4-channel
	Output	1-channel

GENERAL

Cable	Integrated cable
Size (L × W × H)	300 mm × 170 mm × 255 mm (11.8" × 6.7" × 10")
Weight	15 kg (33.1 lb)
Mounted	Desk