


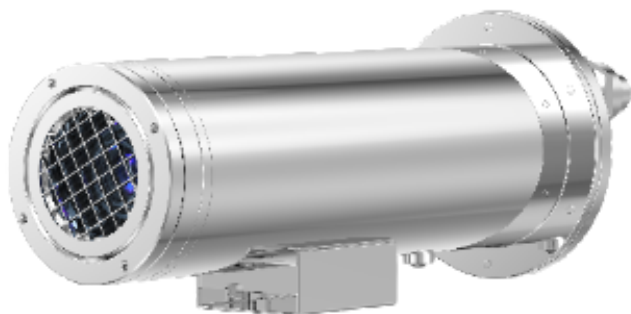

Features

- Explosion-proof, dustproof, waterproof, and corrosion-resistant for reliable performance in harsh environments.
- Suitable for hazardous Gas Zones 1/2, Dust Zones 20/21/22.
- Certifications: ATEX, IECEx
- Material: Stainless Steel 304/316L

Specifications

GENERAL SPECIFICATIONS

Certificate	II 2G Ex db IIC T6 Gb II 2D Ex tb IIIC 85°C Db
Dimensions	464 x 166 x 171 mm
Ingress Protection	IP66, IP68, IP69
Cable Thread Hole	2 pieces - M25 x 1.5
Weight	8.6 kg / 19 lbs
Material	Stainless steel 304/316L
Surface Treatment	Stainless steel (standard), electropolish (optional)
Accessories	Wall mount, corner bracket, pole mount

ENVIRONMENTAL

Ambient Temperature	-40°C to +60°C (-40 °F to 140 °F)
Air Pressure	80 - 110 KPa
Operating Humidity	≤ 95% RH

Dimensions

